

# (12) UK Patent Application (19) GB (11) 2 299 492 (13) A

(43) Date of A Publication 02.10.1996

(21) Application No 9506346.7

(22) Date of Filing 28.03.1995

(71) Applicant(s)  
Sony United Kingdom Limited  
(Incorporated in the United Kingdom)

The Heights, Brooklands, WEYBRIDGE, Surrey,  
KT13 0XW, United Kingdom

(72) Inventor(s)  
Peter Charles Eastty  
William Edmund Cranstoun Kentish

(74) Agent and/or Address for Service  
D Young & Co  
21 New Fetter Lane, LONDON, EC4A 1DA,  
United Kingdom

(51) INT CL<sup>6</sup>  
H04H 7/00, G05B 19/16

(52) UK CL (Edition O )  
H4R RSX  
G3N NGE1B N287  
G4A AFP  
U1S S2098 S2107 S2183

(56) Documents Cited

GB 2254714 A	GB 2243006 A	GB 2166571 A
GB 2155671 A	GB 2115588 A	GB 1571218 A
GB 1570262 A	GB 1258601 A	EP 0600224 A1
EP 0595619 A2	EP 0405939 A2	EP 0394939 A2
EP 0291549 A1	EP 0257813 A2	EP 0251646 A2
EP 0039997 A1	WO 93/03549 A1	WO 91/15851 A1
WO 84/01635 A1	US 5293102 A	US 5133081 A
US 5060068 A	US 4835626 A	US 4380029 A

(58) Field of Search  
UK CL (Edition N ) G4A ACX AFD AFP APB APX  
AUXX, H4R RSX  
INT CL<sup>6</sup> G05B 19/16, G11B 27/30 27/32, H04H 7/00,  
H04S 7/00  
Online:WPI

## (54) Automation of signal processing apparatus

(57) Signal processing apparatus, such as an audio mixing console 230, has at least two sets of automated signal processing functions controlled by stored automation commands, at times dependent upon at least two respective timecode signals TC1, TC2 which may each be associated with a respective source signal audio 1, audio 2 supplied to the signal processing apparatus, e.g. by tape recorders 210, 220. The automation controller 240 receives signals TC1, TC2 and accesses stored automation data from, e.g. a floppy disc storage medium 250. Each automation command has an associated timecode identifying number TC#. One command can "call" a further set of commands which may be executed in parallel, Figs. 9a - c (not shown). The commands specify control quantities, such as gain or filter response characteristics and are translated for use on different mixing consoles using a mapping table, Figs. 4, 5, (not shown).

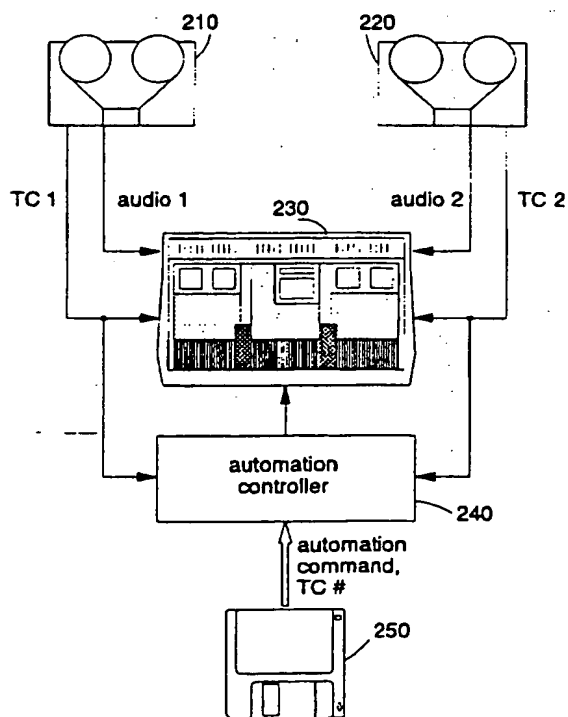
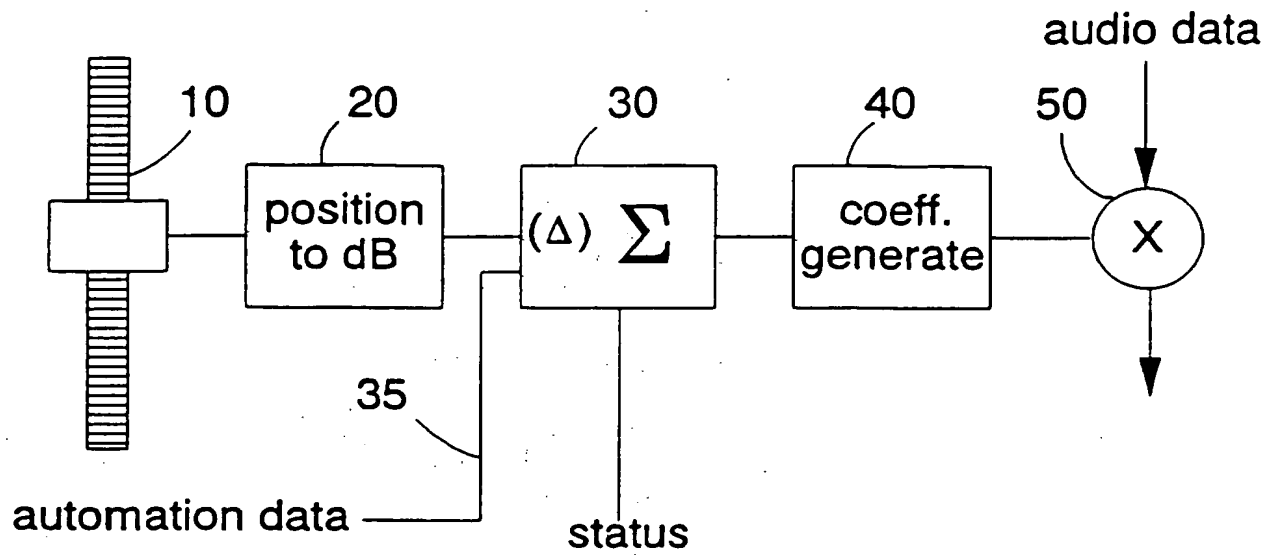
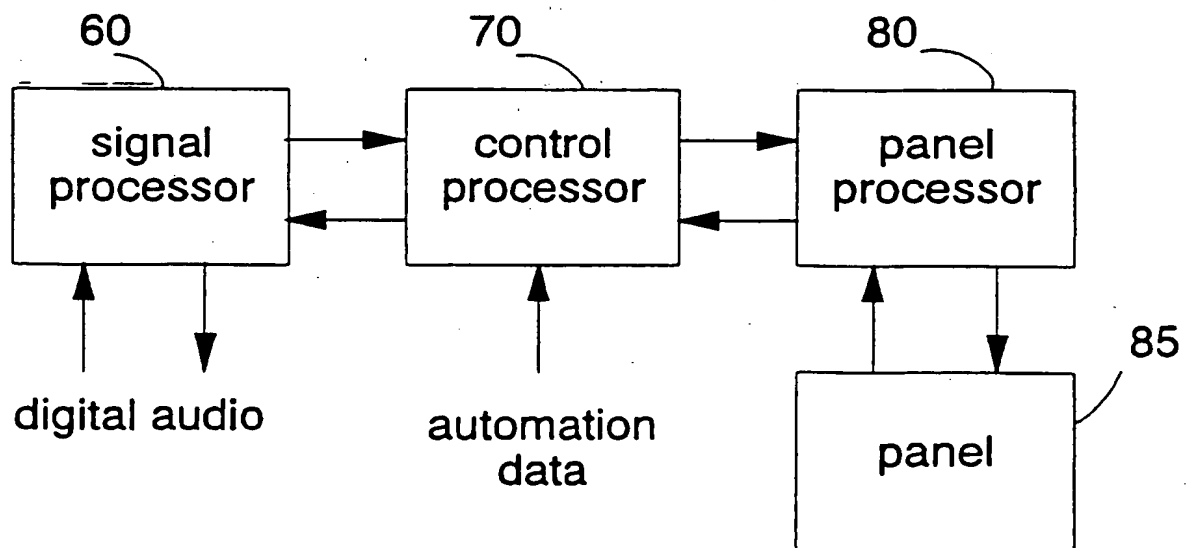
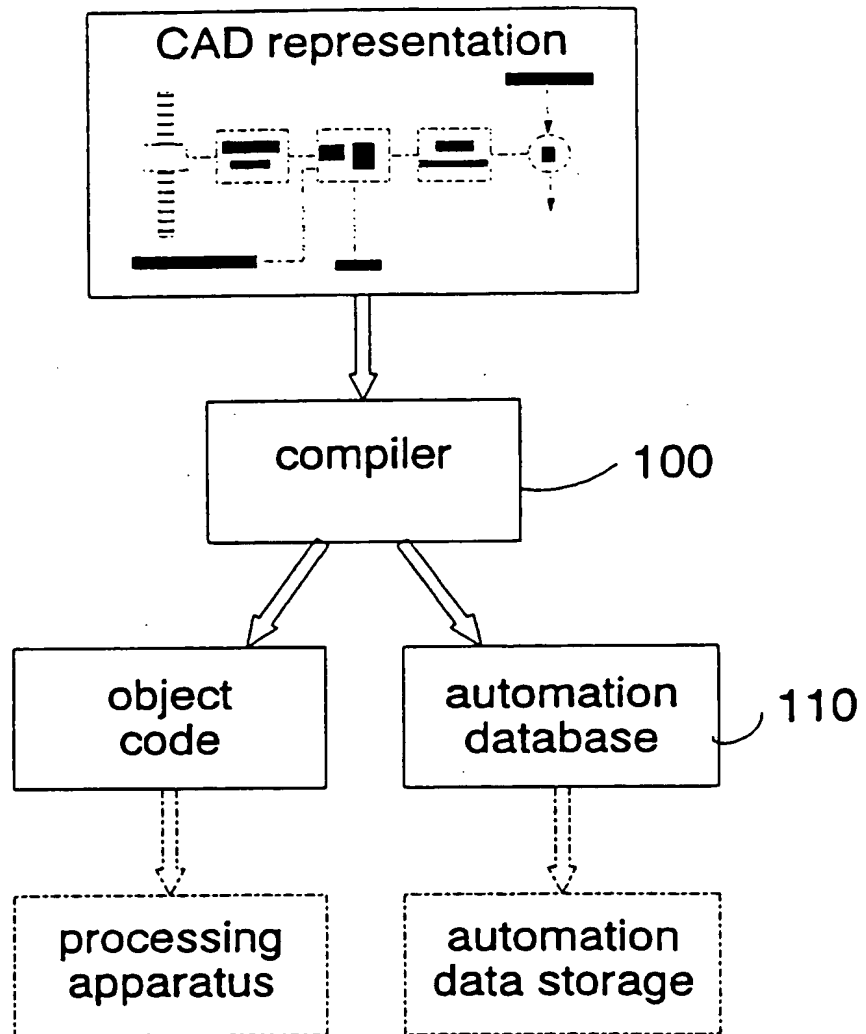


Fig. 6

GB 2 299 492 A

*Fig. 1**Fig. 2*

*Fig. 3*

3/7

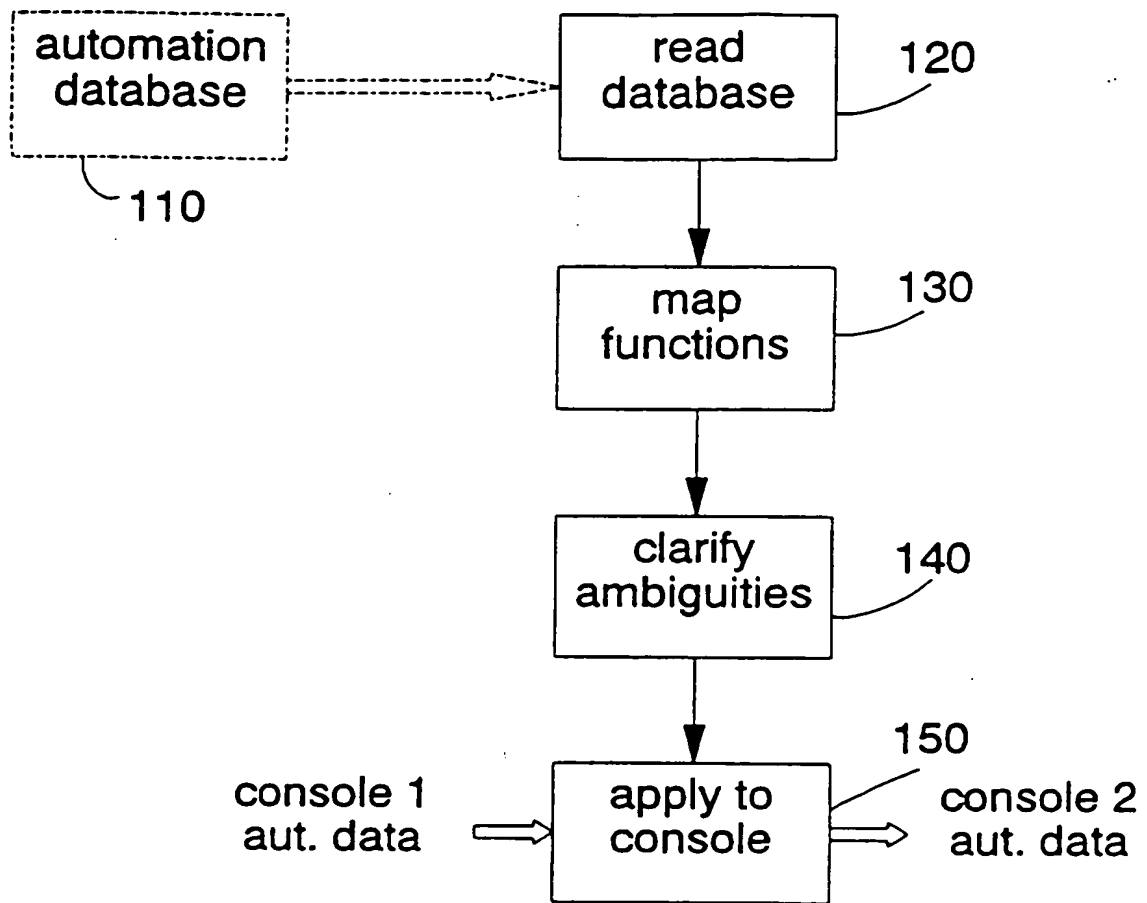


Fig. 4

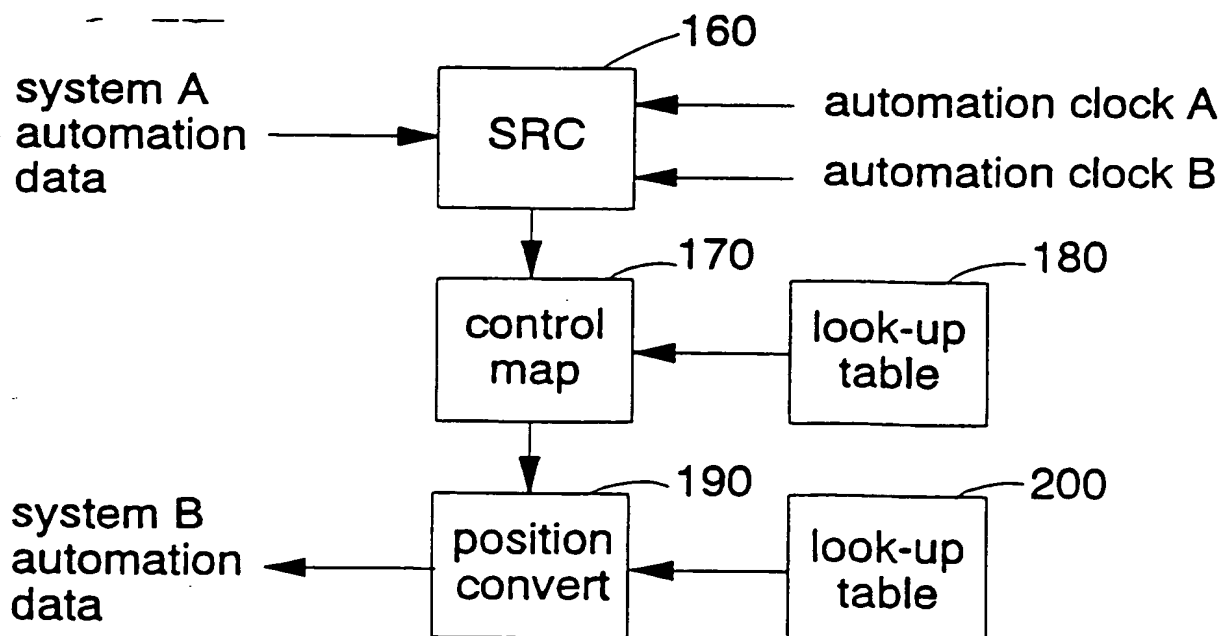
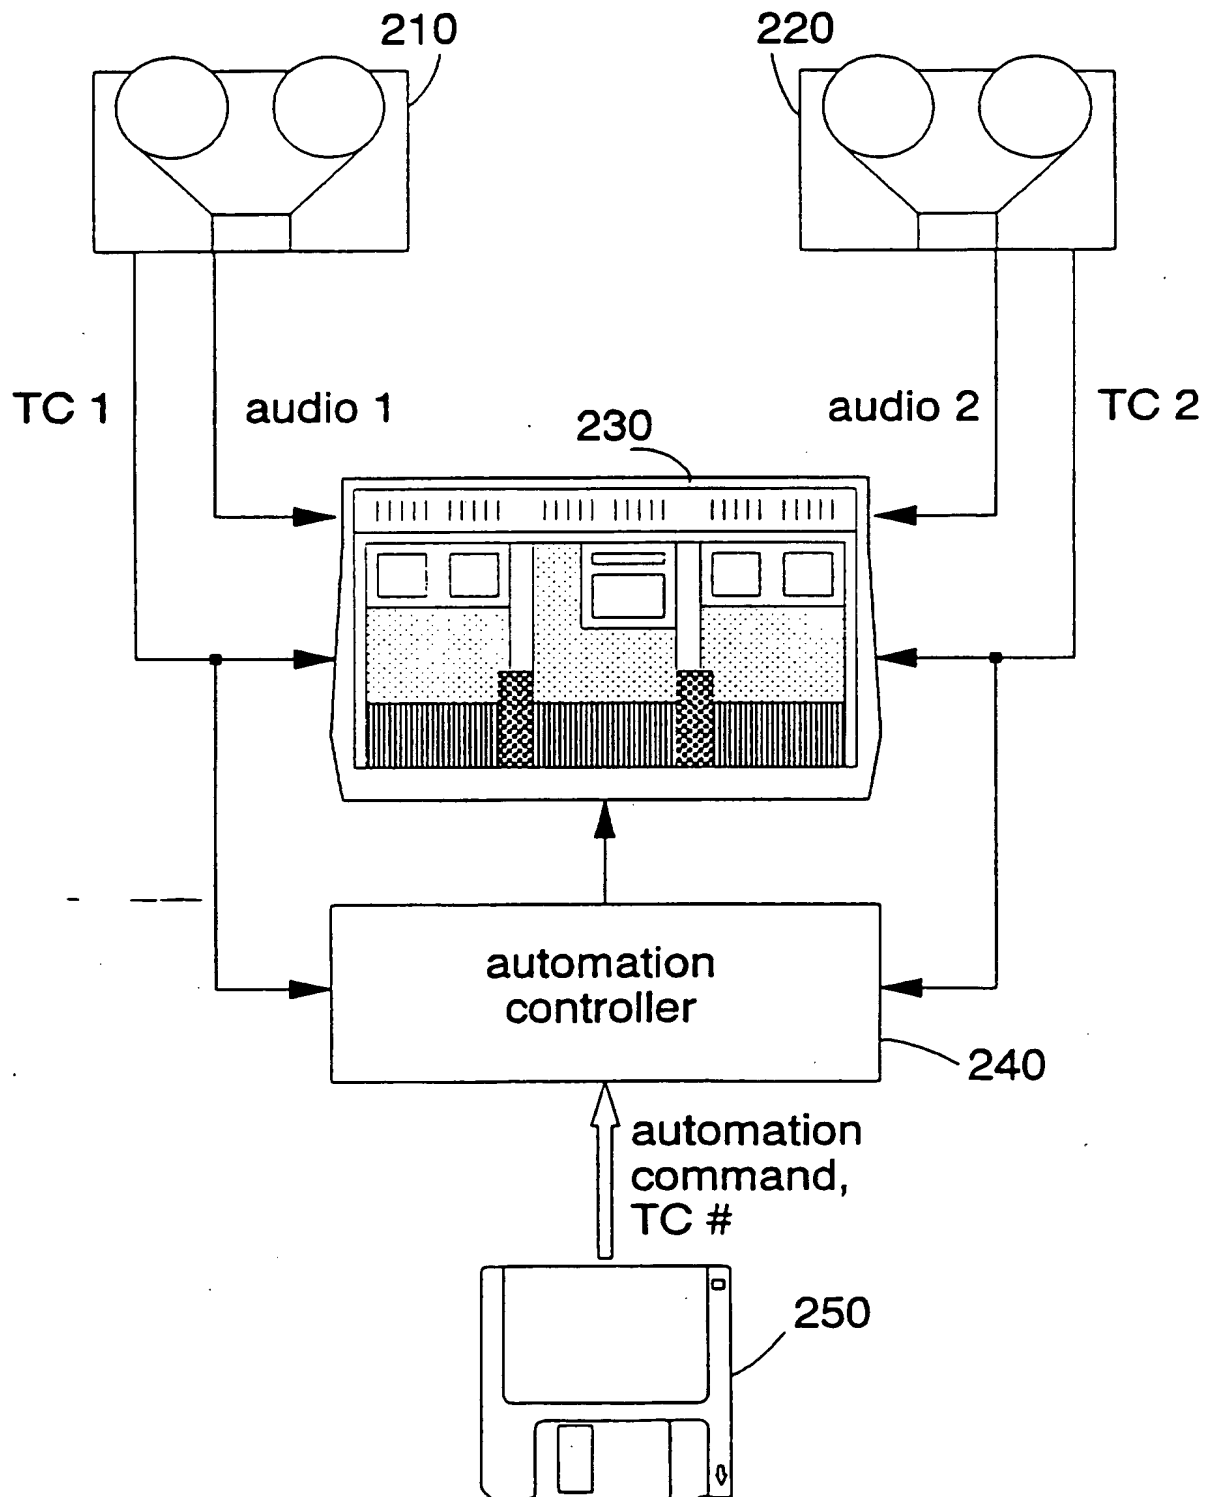


Fig. 5

*Fig. 6*

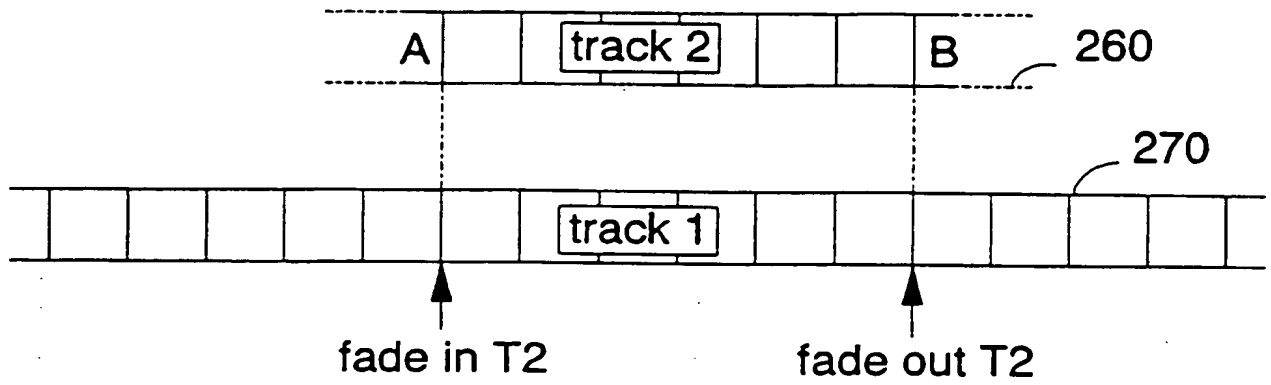


Fig. 7a

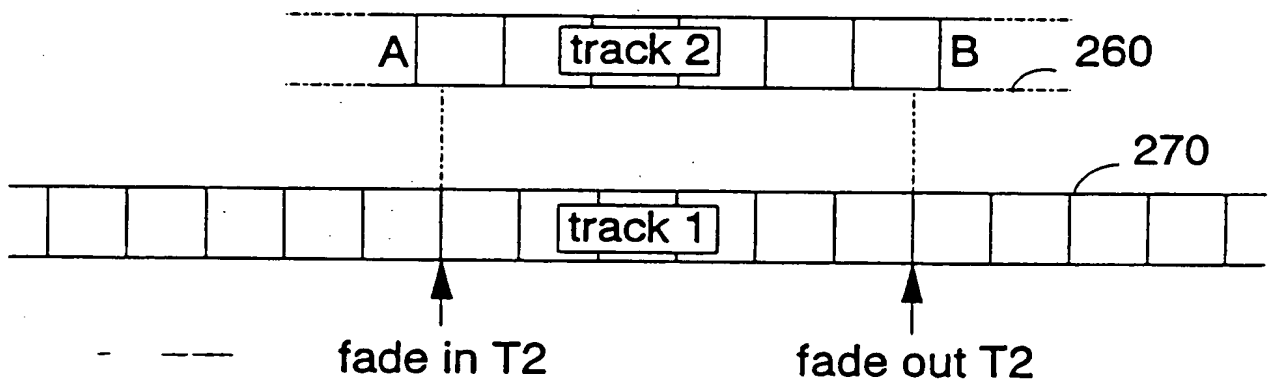


Fig. 7b




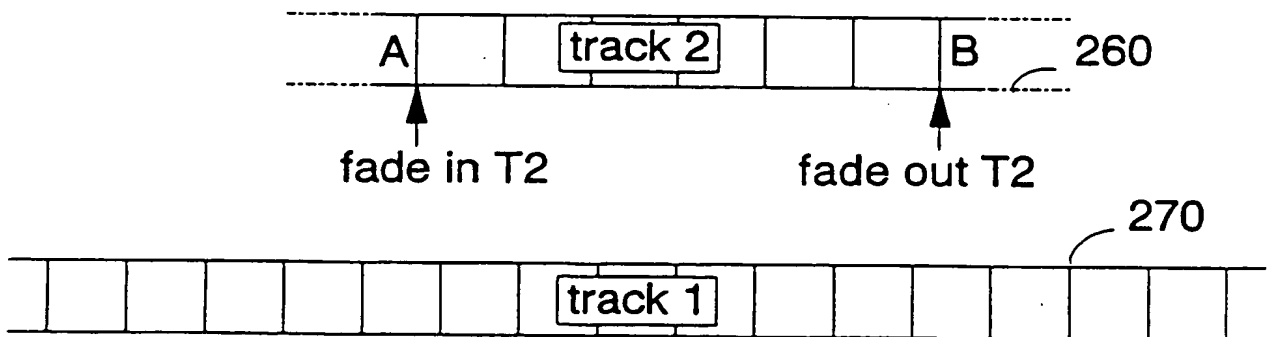


Fig. 7c


*Fig. 8*

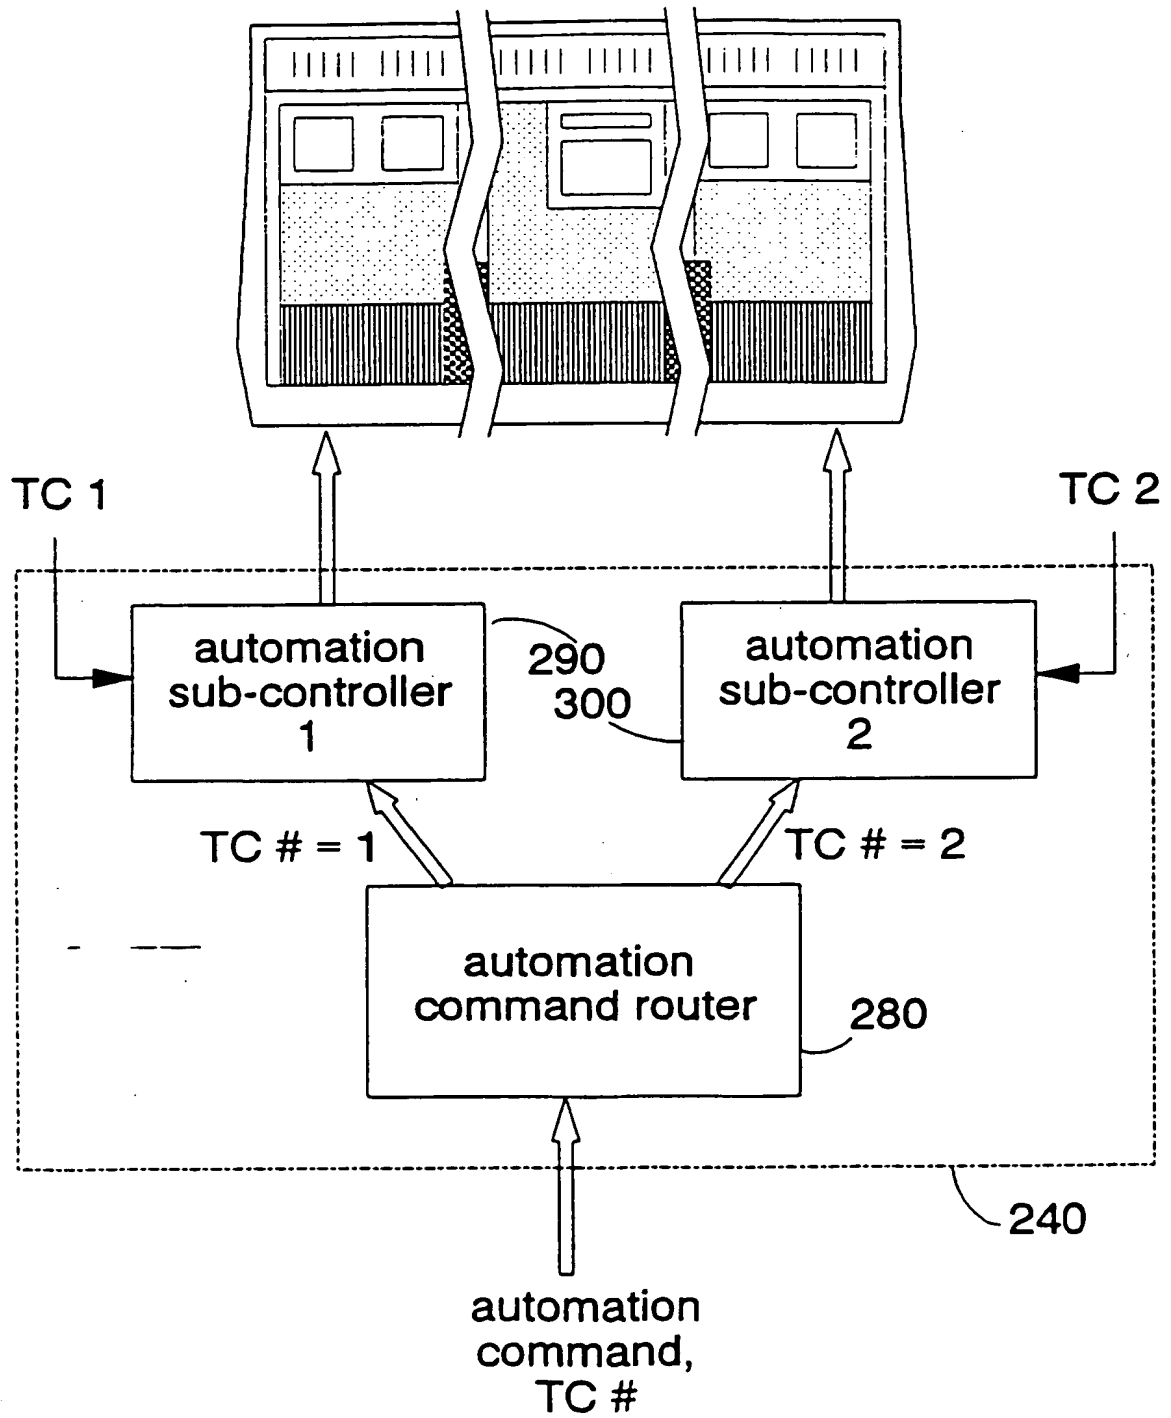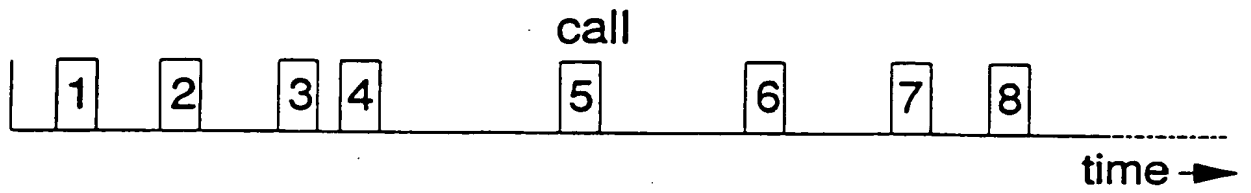

*Fig. 9a*

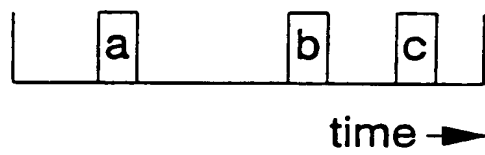

*Fig. 9b*

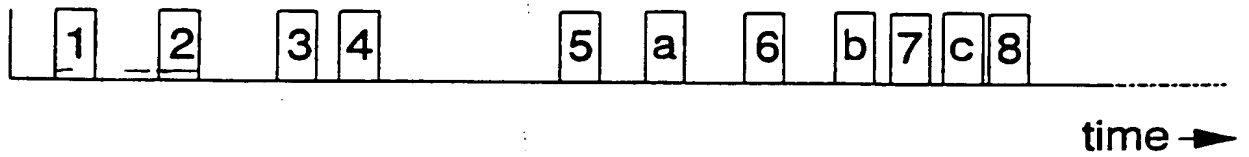

*Fig. 9c*



AUTOMATION OF SIGNAL PROCESSING APPARATUS

This invention relates to the automation of signal processing apparatus such as, for example, a digital audio mixing console.

5 In conventional automated audio mixing consoles, the time-dependent operation of the console is synchronized with respect to a single timecode signal. This timecode signal is usually provided by, for example, a tape recorder associated with the console. Items which are synchronized with the timecode signal include the automation of the  
10 console control positions, such as the positions of control faders and potentiometers.

It is possible to operate a console to receive audio signals from two or more tape recorders running at different speeds. However, in a conventional console it is then necessary to automate the desk in  
15 accordance with the timecode signal from one of the tape recorders only.

This invention provides signal processing apparatus in which at least two sets of automated signal processing functions are controlled by stored automation commands, at times dependent upon at least two  
20 respective timecode signals.

The invention recognises that problems can arise with a console receiving signals from at least two sources (e.g. tape recorders) but which is synchronised to only one timecode signal, especially in cases when the replay speed of one of the signal sources is varied.  
25 Automated processing operations acting on the signal from one source but which are synchronised to the timecode of the other source can become out of step with the signal to be processed.

The invention addresses this problem by providing signal processing apparatus (e.g. a mixing console) in which subsets of parts  
30 or functions of the apparatus are operable in synchronism with respective different timecode signals. In this way, if two or more sources of timecode are used with the console, then each of the timecode signals can be associated with a respective set of mixing controls. This means that the mixer controls used in the mixing of the  
35 output of a tape recorder are automated in synchronism with the timecode from that source (e.g. tape recorder). If the tape recorder is operated at a slightly different speed, the timing of the automated

edit points changes so that the automated operations occur at the appropriate time in the replayed or recorded audio.

Each timecode signal may be associated with a respective source signal supplied to the apparatus.

5            Preferably the apparatus is an audio mixing console, such as a digital audio mixing console.

10           Although the apparatus could compare each automation command with a predetermined list of automated operations for each of the timecodes, there is greater flexibility of operation if the timecodes are specified for each individual automation command. To this end, it is preferred that the apparatus comprises means for receiving automation commands, each comprising an automation control command and information specifying one of the timecode signals.

15           Although the automation commands could be supplied externally, it is preferred that the receiving means comprises means for retrieving automation commands stored on a storage medium.

            Preferably the storage medium is a magnetic disk medium, a magnetic tape medium or an optical disk medium.

20           In addition to the automation commands, it is preferred that the apparatus also comprises means for recording and/or retrieving an automation database on the storage medium, the automation database specifying automation points within the signal processing apparatus on which the stored automation commands were generated.

25           The stored automation database may advantageously be used later not only to convert the automation data on that storage medium for use on other consoles, but also as a check that automation data being retrieved for use with a particular console was originated on a console of the same or a compatible design.

30           In order to use the stored automation database as a check that the automation commands are compatible with the apparatus currently retrieving those commands, it is preferred that the apparatus comprises means for comparing the retrieved automation database with an automation database associated with the apparatus, to detect whether the stored automation commands are compatible with the apparatus.

35           In previous mixing consoles, the automation commands have specified the physical position of particular console controls such as faders or potentiometers. This makes the automation commands specific

not only to a particular layout of console but also to the particular fader response laws used to map the position of the faders into control quantities (e.g. gain or filter response characteristics) to be applied to the signal. In order to reduce this specificity, thus allowing easier translation of automation commands from one console to another, in embodiments of the invention it is preferred that the automation commands specify respective control quantities to be applied to a source signal.

This invention also provides signal processing apparatus in which automated signal processing functions are controlled by stored automation commands, the apparatus comprising means, responsive to a detection of an automation command in a current set of automation commands calling a further set of automation commands, for initiating execution of the further set of automation commands. Such apparatus conveniently allows lists or sets of automation commands to be "nested" so that one set can call another set.

This invention also provides signal processing apparatus in which automated signal processing functions are controlled by stored automation commands, the automation commands specifying respective control quantities to be applied to a source signal.

This invention also provides a storage medium on which automation commands for a signal processing apparatus are stored, each stored automation command having associated stored information specifying one of at least two timecode signals.

This invention also provides a storage medium on which automation commands for an automated signal processing apparatus and an automation database is stored, the automation database specifying the automation points within the signal processing apparatus on which the stored automation commands were generated.

This invention also provides a method of translating automation commands generated at a first command rate on a first automated signal processing apparatus into automation commands at a second command rate for use on a second automated signal processing apparatus, the method comprising the steps of:

sample-rate converting the automation commands from the first command rate to the second command rate; and

mapping the sample-rate converted automation commands into

equivalent commands for use on the second automated signal processing apparatus.

This invention also provides a method of translating automation commands stored on a storage medium and generated on a first automated signal processing apparatus into automation commands for use on a second automated signal processing apparatus. the storage medium storing an automation database specifying automation points within the first automated signal processing apparatus, the method comprising the steps of:

- retrieving the automation database;
- comparing the retrieved automation database with a second automation database associated with the second apparatus, to generate a mapping table defining a mapping of the automation commands generated on the first apparatus to automation commands for use on the second apparatus; and
- translating, in accordance with the mapping table, the stored automation commands into automation commands for use on the second apparatus.

An embodiment of the invention will now be described, by way of example only, with reference to the accompanying drawings, throughout which like parts are referred to by like references, and in which:

Figure 1 is a schematic representation of a part of a digital audio mixing console;

Figure 2 is a schematic diagram illustrating the processing structure of a digital audio mixing console;

Figure 3 is a schematic diagram illustrating the generation of object code for use in the digital audio mixing console of Figure 2;

Figure 4 is a schematic flow chart showing the translation of automation data from one digital audio mixing console to another digital audio mixing console using an automation database;

Figure 5 is a schematic flow chart showing the translation of automation data from one digital audio mixing console to another digital audio mixing console without using an automation database;

Figure 6 is a schematic diagram of a digital audio mixing console operating in accordance with more than one timecode signal;

Figures 7a to 7c are schematic diagrams of an editing operation showing the use of more than one timecode in the console of Figure 6;

Figure 8 is a schematic diagram illustrating the operation of the console of Figure 6 in more detail; and

Figures 9a to 9c illustrate one edit decision list calling another edit decision list in the console of Figure 6.

5 Referring now to Figure 1, a small part of the channel processing for one audio channel of a digital audio mixing console comprises a fader (potentiometer) 10, a unit converting the position of the fader into a control quantity (such as decibels of gain) for processing the audio data of that channel, a summation unit 30, a coefficient  
10 generator 40 and a multiplier 50.

In operation, a user can specify the gain to be applied to an input audio signal by moving the fader 10. The physical position of the fader is digitised and passed to the position converter 20. The position conversion unit 20 maps the digitised position of the fader 10  
15 onto a corresponding gain value in decibels, to be passed to the summation unit 30.

The summation unit 30 operates under the control of a status signal (which can be set by the user operating a panel control) with the following possible modes of operation:

20

1) Fully manual operation in which the summation unit simply passes the output of the position conversion unit 20 to the coefficient generator 40;

25

2) Fully automated operation in which the summation unit 30 passes automation data 35 stored on, for example, an automation tape or disc to the coefficient generator 40. The output of the position converter 20 is not used; and

30

3) Automated operation with manual override in which the summation unit 30 adds the stored automation data 35 to any detected change ( $\Delta$ ) in the output of the position converter 20. In this way, the automation data 35 is used as a default, but can be overridden by the user moving the fader 10.

35

The output of the summation unit 30, representing in this example a signal gain in decibels, is then supplied to the coefficient

generator 40 which converts that required signal gain into a multiplication coefficient; the input audio data is then multiplied by that multiplication factor in the multiplier 50.

5 In Figure 1, the automation data 35 supplied to the summation unit 30 is equivalent in form and meaning to the output of the position converter 20. In other words, the automation data 35 specifies a control quantity (in this example, a gain in decibels; in other examples, the control quantity might define a filter response) to be applied to the signal, rather than merely representing the physical position of a control fader or potentiometer. As described below, this feature makes the transfer of automation data between different consoles much more straightforward.

Figure 2 is a schematic diagram illustrating the processing structure of a digital audio mixing console.

15 In Figure 2, the user operates controls on a control panel or desk 85. These controls might be switches, faders, potentiometers and the like. The panel also provides displays of, for example, signal level, signal routing, equalizer operation and the like. A panel processor 80 processes data received from the panel 85 and data to be displayed on the panel 85.

20 The panel processor is in turn connected to a control processor 70 which receives information from the panel processor indicative of control positions set by the user on the panel, and uses that information to control the operation of a signal processor 60.

25 The signal processor 60 receives digital audio data and, in response to control information supplied by the control processor 70, performs various multiple filtering and mixing operations on the digital audio data.

30 Comparing Figures 1 and 2, the fader 10 forms part of the panel 85, with the panel processor 85 controlling the digitising of the fader position. The position converter 20, summation unit 30 and coefficient generator 40 are embodied by the control processor 70. Finally, the only part of Figure 1 which is actually part of the signal path, the multiplier 50, is provided by the signal processor 60.

35 Accordingly, the automation data 35 supplied to the summation unit 30 in Figure 1 is actually routed to the control processor 70 in Figure 2.

The control processor 70 and the signal processor 60 are in fact programmable digital data processing devices running suitable object code to provide the functions described above. Figure 3 is a schematic diagram illustrating the generation of the object code for use in the digital audio mixing console of Figure 2.

The basic technique for generating suitable object code is described in the following references:

1. "An automated approach to digital console design", W Kentish & C Bell, 81st Audio Engineering Society (AES) Convention preprint, 1986;
2. "Digital audio processing on a grand scale", P Eastty, 81st AES Convention preprint, 1986; and
3. "Automatic generation of microcode for a digital audio signal processor", C McCulloch, 81st AES Convention preprint, 1986.

To summarise the technique described in the above references, a schematic circuit diagram similar in form to that shown in Figure 1 is set up on a computer-aided design (CAD) system. A netlist is generated from the CAD representation and is then compiled to produce the object code for running on the control processor 70 and the signal processor 80. In Figure 3, these stages are shown as a single compilation stage 100.

The above process is as described in the three references specified above. A modification of the process in the present embodiment is the generation of an automation database 110. This is a schedule of all of the automation "points" (such as the input to the summation unit 30 in Figure 1) specified in the CAD representation of a particular digital mixing console. In other words, the automation database 110 provides a list of operations in the mixing console which can be automated. When a set of automation data generated on a particular console is stored on a tape or disc, the automation database for that console is stored on the same medium. This means that the storage medium contains information (the automation database) specifying the system on which that automation data was generated. This can be used later not only to convert the automation data for use on other consoles, but also as a check that automation data being retrieved for use with a particular console was originated on a console

of the same design.

In other words, this embodiment allows the production of storage media (magnetic tapes, magnetic or optical disks, electronic memories etc) holding an automation database and a series of automation commands (which may include timecode information as discussed below).

It will be appreciated that the above coding and compilation steps could be performed manually using a known computer programming language.

Figure 4 is a schematic flowchart showing the translation of automation data from one digital audio mixing console to another similar (but different) console using the automation database. This translation can be performed using, for example, a suitably programmed general purpose computer, or by a suitable program running on a programmable signal processing apparatus.

At a step 120 the automation database 110 is read from the storage medium on which it is provided. The automated functions, such as "channel 1 input gain" are then mapped at a step 130 to identical or corresponding functions in the target mixing console by comparison of the database 110 with the corresponding database for the target console, to generate a mapping or look-up table. If there are any ambiguities, or any functions in the original console which do not map to target functions in the target console, these ambiguities can be clarified at a step 140 by requesting input from the user.

At the end of the step 140, there exists a mapping table which maps each item of possible automation data from the original console (console 1) onto a corresponding function in the target console (console 2). At a step 150, this mapping table is applied to each successive command of the automation data from the original console to generate automation data for the target console.

Figure 5 is schematic flowchart showing the translation of automation data from one digital audio mixing console to another digital audio mixing console without using an automation database.

In general, automation data from a particular system refers to sampled control positions at a particular sampling rate (for example, 100Hz). The first stage, therefore, is sample rate conversion (a step 160) under the control of clock signals defining the sampling rate for automation data in the original and target systems.



At a step 170 the encoding of the control positions, and the resulting effect of those control movements on the processing of the audio signals, are converted to those of the target system using a manually-generated look-up table 180.

5 Finally, the location of the automated controls on the mixing console must be mapped to the corresponding locations of controls on the target mixing console at a step 190, again using a manually generated look-up table 200.

10 Figure 6 is a schematic diagram of a digital mixing console operating in accordance with more than one timecode signal.

In conventional audio mixing consoles, the time-dependent operation of the console is synchronised by a single timecode signal. This signal is usually provided by, for example, a tape recorder associated with the console. Items which are synchronised with the  
15 timecode signal include the automation of the console controls.

In the apparatus of Figure 6, two tape recorders 210, 220 are used with a single mixing console 230. Each tape recorder supplies a respective audio signal and a respective timecode signal to the console 230.

20 The automation of the console 230 is controlled by an automation controller 240, to be described in more detail below. The automation controller 240 receives both of the timecode signals from the two tape recorders and accesses stored automation data from, for example, a floppy disc storage medium 250. The stored automation data is similar  
25 to conventional automation data or to automation data described above, except that each automation command has an associated timecode identifying number (TC #).

The automation controller detects the timecode number associated with each automation command, and carries out the operation defined by  
30 that command in synchronism with the appropriate one of the timecodes.

In order to demonstrate a benefit of such a scheme, Figures 7a to 7c are schematic diagrams of an editing operation showing the use of more than one timecode.

35 Each of Figures 7a to 7c shows one track 260 of the signal replayed from one of the tape recorders 210, 220 being faded into a track 270 replayed from the other of the tape recorders 210, 220. The fade is intended to start at a position A and to end at a position B in

the track 260.

5 In Figure 7a, only one timecode is used to determine the automation of the mixing console, and so the points at which the track 260 is faded in and out are specified with respect to the timecode of the track 270. This can lead to problems if, as shown in Figure 7b, the relative speeds of the two tape recorders are changed. In Figure 7b, the track 260 is replayed slightly slower than the track 270, and so the fade in and out points defined with respect to the timecode of the track 270 do not occur at the correct points on the track 260.

10 In Figure 7c, the fade in and out points for the track 260 are defined with respect to the timecode associated with that track (260). However, other editing operations relevant to the track 270 are defined with respect to the timecode associated with that track (270). This means that a slight change in relative speed of the different tape recorders does not affect the accuracy of selected cue points or editing operations.

15 Figure 8 is a schematic diagram illustrating the operation of the console of Figure 6 in more detail.

20 In particular, the automation controller 240 comprises an automation command router 280 and two automation sub-controllers 290, 300. Each of the automation sub-controllers receives one of the timecode signals from a respective tape recorder 210, 220 and controls the operation of respective parts of the mixing console, such that the automated operation of any particular part of the console is controlled by either one or the other of the automation sub-controllers. Apart from the fact that the automation sub-controllers 290, 300 control only a sub-set of the operation of the mixing console, they are otherwise conventional or as described above.

25 The automation command router 280 receives the automation commands and associated timecode numbers from the storage medium 250. The automation command router 280 then routes automation commands for which the timecode number specifies the timecode of the tape recorder 210 to the automation sub-controller 290. Similarly, where the timecode number specifies the tape recorder 220, commands are routed to the other automation sub-controller 300.

35 When the automation commands are recorded onto the floppy disk 250, the user indicates which console controls, or alternatively which

particular commands. are to be associated with the various timecodes (e.g. TC1, TC2). This can be done simply by selecting particular controls on a screen-driven menu, or by depressing timecode selection switches associated with particular controls or groups of controls. After this selection has been carried out, the automation data is recorded conventionally, except that a short (e.g. one byte) code is appended to (or otherwise associated with) each automation command, to form the timecode identifier for that command.

The systems described above perform automation of the console controls using a single linear series of automation commands known as an edit decision list (EDL). As described above, these commands may be associated with different respective timecode sources, but the EDL is still essentially a serial list of commands to be carried out.

In certain embodiments, however, EDLs can be "nested", so that one EDL can call another EDL and either transfer control to the called EDL or execute commands of the called EDL in parallel with commands of the calling EDL. This feature can be used with or without the multiple timecode operation described above.

Figures 9a to 9c illustrate an example of this process, in which a called EDL is executed in parallel with existing commands of the calling EDL.

In particular, Figure 9a illustrates an EDL which is read by the automation controller 240 from the floppy disk 150 and stored in a random access memory (not shown) in the automation controller 240. The EDL comprises a series of commands, numbered 1, 2, 3 ... 8 ..., to be executed at respective times. However, one of the commands, command 5, is actually a "call" command, which calls a second EDL illustrated in Figure 9b. The called EDL comprises only three commands, referred to as commands a, b and c, which have respective times of operation as shown schematically in Figure 9b.

In order to execute the call, the automation controller 240 reads the EDL of Figure 9b from the floppy disk 250 and superimposes the commands of the EDL of Figure 9b onto the EDL of Figure 9a as held in the random access memory to form a composite EDL as shown in Figure 9c. Commands of the composite EDL are then executed serially, as normal.

If control is to be transferred to the called EDL, then the automation controller simply has to erase the remaining commands of the

calling EDL when the called EDL is loaded into the memory.

CLAIMS

1. Signal processing apparatus in which at least two sets of automated signal processing functions are controlled by stored automation commands, at times dependent upon at least two respective timecode signals.
2. Apparatus according to claim 1, in which each timecode signal is associated with a respective source signal supplied to the signal processing apparatus.
3. Apparatus according to claim 1 or claim 2, the apparatus being an audio mixing console.
4. Apparatus according to any one of claims 1 to 3, comprising means for receiving automation commands, each comprising an automation control command and information specifying one of the timecode signals.
5. Apparatus according to claim 4, in which the receiving means comprises means for retrieving automation commands stored on a storage medium.
6. Apparatus according to claim 5, in which the storage medium is a magnetic disk medium, a magnetic tape medium, or an optical disk medium.
7. Apparatus according to claim 5 or claim 6, comprising means for recording and/or retrieving an automation database on the storage medium, the automation database specifying the automation points within the signal processing apparatus on which the stored automation commands were generated.
8. Apparatus according to claim 7, comprising means for comparing the retrieved automation database with an automation database associated with the apparatus, to detect whether the stored automation commands are compatible with the apparatus.

9. Apparatus according to any one of the preceding claims, comprising:

means, responsive to a detection of an automation command in a current set of automation commands calling a further set of automation commands, for initiating execution of the further set of automation commands.

10. Apparatus according to any one of the preceding claims, in which the automation commands specify respective control quantities to be applied to a source signal.

11. Apparatus according to any one of the preceding claims, comprising means for recording automation commands on a storage medium, together with information identifying a respective timecode associated with each automation command.

12. Signal processing apparatus in which automated signal processing functions are controlled by stored automation commands, the apparatus comprising means, responsive to a detection of an automation command in a current set of automation commands calling a further set of automation commands, for initiating execution of the further set of automation commands.

13. Signal processing apparatus in which automated signal processing functions are controlled by stored automation commands, the automation commands specifying respective control quantities to be applied to a source signal.

14. A storage medium on which automation commands for a signal processing apparatus are stored, each stored automation command having associated stored information specifying one of at least two timecode signals.

15. A storage medium according to claim 14, on which an automation database is stored, the automation database specifying the automation points within the signal processing apparatus on which the stored automation commands were generated.

16. A storage medium on which automation commands for an automated signal processing apparatus and an automation database are stored, the automation database specifying automation points within the signal processing apparatus on which the stored automation commands were generated.

17. A storage medium according to any one of claims 14 to 16, the storage medium being a magnetic disk medium, a magnetic tape medium or an optical disk medium.

18. A method of translating automation commands generated at a first command rate on a first automated signal processing apparatus into automation commands at a second command rate for use on a second automated signal processing apparatus, the method comprising the steps of:

sample-rate converting the automation commands from the first command rate to the second command rate; and

mapping the sample-rate converted automation commands into equivalent commands for use on the second automated signal processing apparatus.

19. A method of translating automation commands stored on a storage medium and generated on a first automated signal processing apparatus into automation commands for use on a second automated signal processing apparatus, the storage medium storing an automation database specifying automation points within the first automated signal processing apparatus, the method comprising the steps of:

retrieving the automation database;

comparing the retrieved automation database with a second automation database associated with the second apparatus, to generate a mapping table defining a mapping of the automation commands generated on the first apparatus to automation commands for use on the second apparatus; and

translating, in accordance with the mapping table, the stored automation commands into automation commands for use on the second apparatus.

20. Signal processing apparatus substantially as hereinbefore described with reference to the accompanying drawings.

5

21. A digital audio mixing console substantially as hereinbefore described with reference to the accompanying drawings.

10

22. A method of translating automation data, the method being substantially as hereinbefore described with reference to the accompanying drawings.

23. A storage medium substantially as hereinbefore described with reference to the accompanying drawings.





Application No: GB 9506346.7  
Claims searched: 1-11

Examiner: Keith Williams  
Date of search: 15 June 1995

**Patents Act 1977**  
**Search Report under Section 17**

**Databases searched:**

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:  
UK CI (Ed.N): H4R (RSX)  
Int CI (Ed.6): H04H 7/00; H04S 7/00  
Other: online WPI

**Documents considered to be relevant:**

Category	Identity of document and relevant passage	Relevant to claims
X	EP0291549A1 Jellinghaus - see abstract	1 at least
X	EP0251646A2 Amek Systems - see page 1, lines 35-37, and page 12, lines 1-24 (equivalent US 4879751)	
A	WO91/15851A3 Palmisano - see abstract	
X	US 5293102 Martinsound Technologies - see column 6, lines 27-28 ( related cases US 5122720 and US 5102373)	1 at least

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.



Application No: GB 9506346.7  
Claims searched: 12

Examiner: Keith Williams  
Date of search: 18 August 1995

**Patents Act 1977**  
**Further Search Report under Section 17**

**Databases searched:**

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:

UK CI (Ed.N): G4A (APB,APX); H4R (RSX)

Int CI (Ed.6): H04H 7/00; H04S 7/00

Other:

**Documents considered to be relevant:**

Category	Identity of document and relevant passage		Relevant to claims
X	GB 2254714 A	Digital Equipment Corp. - see abstract	12
X	GB 2166571 A	Sadleir Computer Research - see Claim 1	12
X	GB 1571218 A	Allen-Bradley Co. - see page 4, lines 5-53; Page 12, line 38, to page 13, line 20.	12
X	GB 1570262 A	Ericsson - see Claim 1	12
X	GB 1258601 A	Western Electric Co. - see page 1, lines 15-46.	12
X	EP 0595619 A2	Sony Corp. - see abstract	12
X	EP 0394939 A2	Sony Corp. - see abstract.	12
X	US 5293102	Martinsound Technologies - see Fig. 6	12
X	US 5133081	Mayo - see column 3, lines 51-64	12
X	US 5060068	Lindstrom - see column 5, lines 30-38	12

X Document indicating lack of novelty or inventive step  
Y Document indicating lack of inventive step if combined with one or more other documents of same category.  
& Member of the same patent family

A Document indicating technological background and/or state of the art.  
P Document published on or after the declared priority date but before the filing date of this invention.  
E Patent document published on or after, but with priority date earlier than, the filing date of this application.



Application No: GB 9506346.7  
Claims searched: 13

Examiner: Keith Williams  
Date of search: 21 August 1995

**Patents Act 1977**  
**Further Search Report under Section 17**

**Databases searched:**

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:

UK CI (Ed.N): G4A (ACX, AUXX); H4R (RSX)

Int CI (Ed.6): H04H 7/00

Other:

**Documents considered to be relevant:**

Category	Identity of document and relevant passage		Relevant to claims
X	GB 2243006 A	Pioneer Electronic Corp. - see eg page 17, lines 9-12	13
X	GB 2155671 A	Sony Corp. - see page 1, lines 5-17	13
X	GB 2115588 A	Sony Corp. - see page 1, lines 3-21	13
X	WO93/03549A1	Euphonix Inc. - see page 29, lines 10-23	13
X	WO91/15851A1	Palmisano - see abstract	13

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.



Application No: GB 9506346.7  
Claims searched: 14, 15, 17

Examiner: Keith Williams  
Date of search: 22 August 1995

**Patents Act 1977**  
**Further Search Report under Section 17**

**Databases searched:**

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:  
UK CI (Ed.N): H4R (RSX)  
Int CI (Ed.6): G05B 19/16; G11B 27/30,27/32; H04H 7/00  
Other: online WPI

**Documents considered to be relevant:**

Category	Identity of document and relevant passage	Relevant to claims
X	EP 0600224 A1 Sony Corp. - see Claims 1,2	14
X	EP 0405939 A2 Sony Corp. - see Claim 1	14
X	EP 0257813 A2 Ampex Corp. - see eg Claim 9	14
X	EP 0251646 A2 Amek Systems - see page 12, lines 1-22	14
X	EP 0039997 A1 Sony Corp. - see eg page 18	14
X	US 4835626 Sony Corp. - see Claim 1	14
X	US 4380029 BTI Computer Systems - see Claims 3,4	14

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.



Application No: GB 9506346.7  
Claims searched: 16,17

Examiner: Keith Williams  
Date of search: 22 August 1995

**Patents Act 1977**  
**Further Search Report under Section 17**

**Databases searched:**

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:

UK Cl (Ed.N): H4R (RSX)

Int Cl (Ed.6): H04H 7/00

Other:

**Documents considered to be relevant:**

Category	Identity of document and relevant passage	Relevant to claims
X	EP 0251646 A2 Amek Systems - see page 3, line 53, to page 4, line 11.	16
X	WO93/03549A1 Euphonix Inc. - see page 29	16

X Document indicating lack of novelty or inventive step  
Y Document indicating lack of inventive step if combined with one or more other documents of same category.  
& Member of the same patent family

A Document indicating technological background and/or state of the art.  
P Document published on or after the declared priority date but before the filing date of this invention.  
E Patent document published on or after, but with priority date earlier than, the filing date of this application.



Application No: GB 9506346.7  
Claims searched: 18,19

Examiner: Keith Williams  
Date of search: 22 August 1995

**Patents Act 1977**  
**Further Search Report under Section 17**

**Databases searched:**

UK Patent Office collections, including GB, EP, WO & US patent specifications, in:  
UK CI (Ed.N): G4A (AFD,AFP); H4R (RSX)  
Int CI (Ed.6): H04H 7/00  
Other: online WPI

**Documents considered to be relevant:**

Category	Identity of document and relevant passage	Relevant to claims
A	WO84/01635A1 IBM Corp. - see whole specification	18,19
A	US 5293102 Martinsound Technologies - see column 7, lines 24-68	18,19

X	Document indicating lack of novelty or inventive step	A	Document indicating technological background and/or state of the art.
Y	Document indicating lack of inventive step if combined with one or more other documents of same category.	P	Document published on or after the declared priority date but before the filing date of this invention.
&	Member of the same patent family	E	Patent document published on or after, but with priority date earlier than, the filing date of this application.